



Customer-Display

The customer display with an appealing look serves as a price and change display as well as simple customer information, e.g. welcome text or date/time. The product is an optional device for Manual.Cash (POS cash register).

Entirely According to Your Needs

Simply mount the customer display onto the display rack or onto the window glass with its suction pads. Decide individually on site.

Compatibility


The continuation of the tried and tested SKIDATA customer display model is ensured. Just exchange your old device. The character set is compatible to the previous display and applications.

Easy Handling

Only one USB port is necessary to provide the display with data and power.

Customer Comfort

The display offers a two-line, alphanumeric display with up to 20 characters per line.

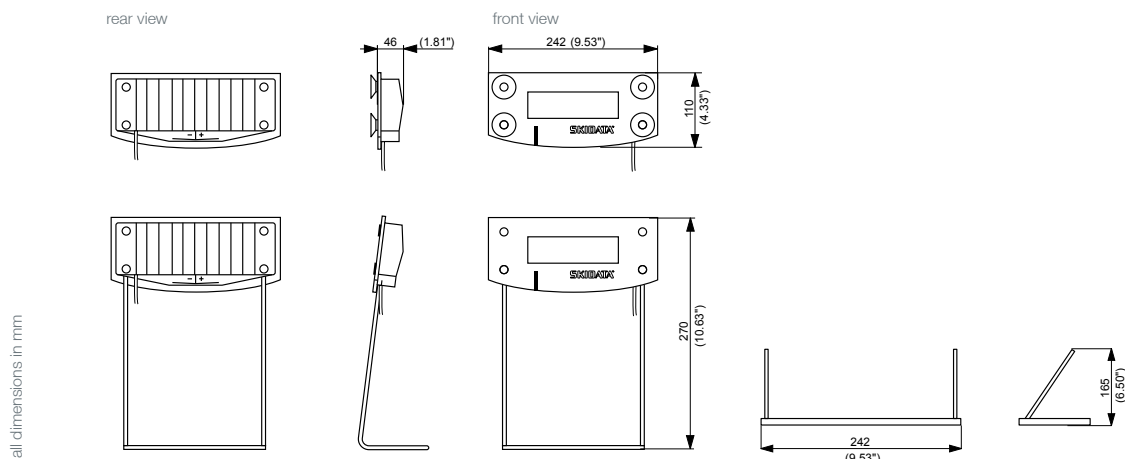

Features

- 2-line alphanumeric display for up to 20 characters per line
- Easily readable, with LED backlight
- Simple installation with suction cups or on support stand
- Manually adjustable contrast and brightness
- Display connection monitoring supported by software protocol
- Can be set e.g. via system program to prevent misuse
- Protocol compatible to previous model
- Display connection and power supply via USB cable

Standard Version

- Customer Display with suction cups for attachment to windows/glass surfaces (detachable)
- Support stand (INOX) for direct on-site desktop placement

Technical Specifications

Display size:	2 x 20 characters
Character set	100% character set compatible with previous model (RS232 version) 0-9, A-Z, a-z ("English/Japanese" ASCII character set) Default special characters: ! " # \$ % & ' () * + , - . / : ; < = > ? @ [\] ^ _ ` { } ~ Additional special characters: €, £, ¥, β, ä, ö, ü (depending on application)
Character height	12.7 mm (0.47")
Resolution:	100 x 16 pixels
Display type	Reflective LCD with LED backlight
Power supply	5V via USB, 500mA
Interface	Virtual COM port via USB, 1200 or 9600* Baud (*default)
Interface mode support	340 (= 1 x 6 characters), 350 (= 2 x 20 characters), 350 K * (= 2 x 16 characters) (* default)
Dimensions	242 mm (9.53") x 110 mm (4.33") x 46 mm (1.81") (w x h x d) without suction cups
Weight	1 kg
Support stand	270 mm (10.63") high, approx. 20° inclination
Casing color	Rear: ~RAL 7043 Traffic Grey B Front: Black (behind glass panel)
USB driver	XP(e)/W2000/SRV2003/Vista (x86 only), W7(e)/W2k8R2 (x86+x64)
USB cable	USB connector, Type A, permanently attached to display, 3m, black